

# ActiveStart

POWER TOOLS By Active Controls

## Quick Start Guide ACS20PT

Instructions:


1. Plug Unit into approved 120/15A Power Receptacle
2. Most generators have Ground and Neutral floating. Bonding Plug is available but not required for our unit to work correctly.
3. Plug Power Tools, Pump or Appliance Power Cord into the ActiveStart PT. There is a delay before output receptacle light is illuminated.
4. Operate power tools or appliance normally.

**Download our app from the Apple or Android app stores. Search for ActiveStart Power Tools Model you can also scan for app using QR below then follow steps below:**

1. Click "New Device" from the connections Screen once the unit is powered ON.
2. App will search for available devices.
3. Select device from list of found devices shown as a mac address. **Ex of MAC Address AC:23:3F:97:XX:XX**
4. The device has a unique pass **key** on the sticker on the back of the unit. **Ex of Key: me5YPUIO**
  - a. **Hint: Use your QR reader app to read the label and do a copy paste of the key into the app to eliminate any mistakes in reading the letters or numbers. Apple users please use 3<sup>rd</sup> party QR reader if camera reads "no usable data found".**
5. Once the pass key is entered the device will show voltage and other information on the main screen.

Visit our website for complete instructions if needed: [Active-Controlsllc.com](http://Active-Controlsllc.com)

App Images:

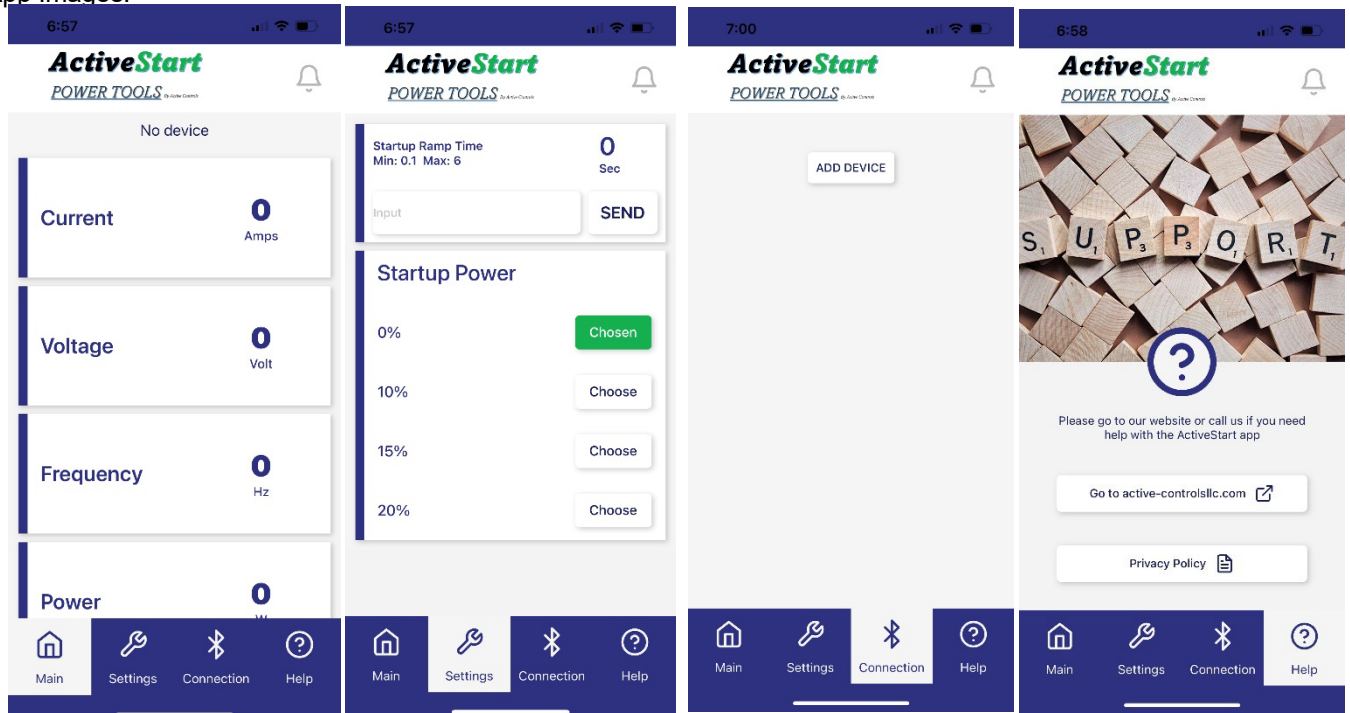

**Caution:**

**Fully insert all Plugs**

Scan to  
download  
app and visit  
website:



**Apple**



**ANDROID**